

Bolphane® BTT+ 125 High Speed polyolefin shrink film



- Enhanced stiffness for high speed machine compatibility
- Instant sealing
- High shrink characteristics at low temperature
- Hot slip properties
- Excellent optics and appearance

Ideally suited for applications where high speed packaging equipment is running.

Exceptional shrink characteristics on irregular shaped items.



Bolphane® BTT+ 125 can be successfully used in applications ranging from multimedia to publishing items as well as office supplies.

» Please contact us for any specific request.

TECHNICAL FEATURES

Grade	125	
Roll length (m)	Singlewound	3 500
	Centerfolded	1 750
Gloss at 20°	114	
Haze (%)	3	
	LD*	TD**
Elongation at break (%)	100	110
Tensile strength (kg/cm ²)	1 150	1 100
Shrinkage (%)	at 93°C	30
	at 120°C	66
	38	67

* LD: Longitudinal Direction – ** TD: Transverse Direction

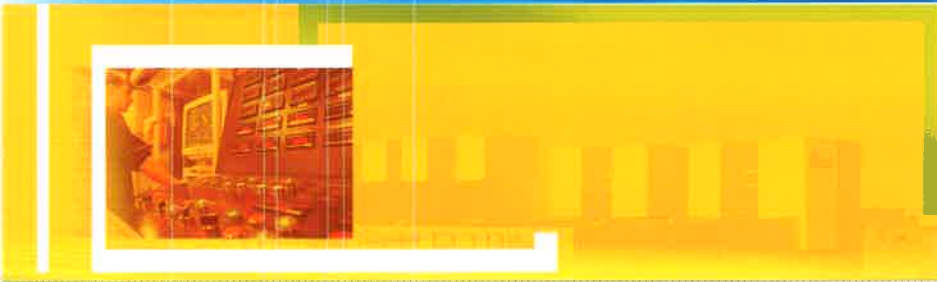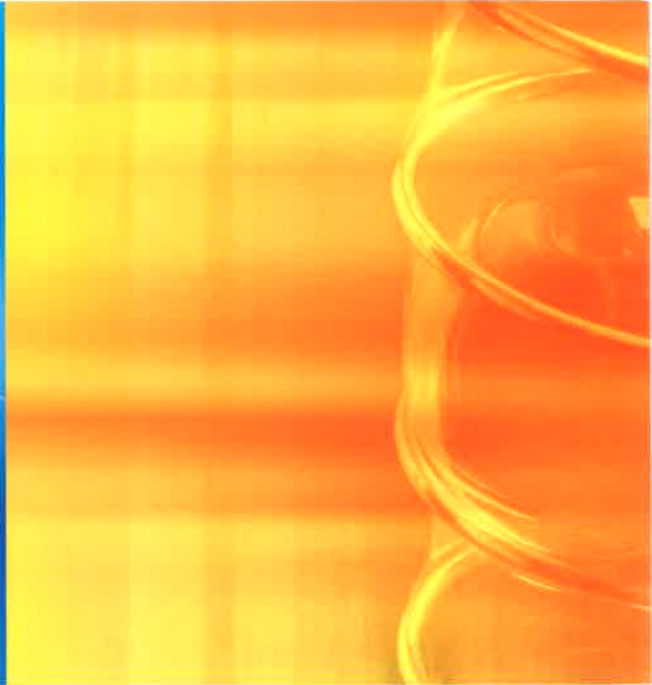

BTT+ 125



Bolphane® Thin Technology



ECO BENEFITS AND COST SAVINGS

Odet - Erault-Gaberic - 29556 Quimper - Cedex 9 France
Tel: 33 (0)2 98 66 72 00 • Fax: 33 (0)2 98 59 67 79
E-mail: contact.packaging@bolloré-technologies.fr
Web : www.bolloréfilms.com

Bolloré
SHRINK FILMS