

Bolphane® BTT+ 90 High Yield polyolefin shrink film



- High speed machine compatibility
- Outstanding shrinkage and fast sealing at low temperature
- Hot slip properties
- Excellent optics
- Improved output and shrinkage due to pre-perforation (standard on the centerfolded version)

Ideally used for applications where high speed packaging equipment is running.

Exceptional shrink characteristics on irregular shaped items.


Bolphane® BTT+ 90 is particularly suited to wrap multimedia and publishing or stationery items, such as gift wrap paper rolls.

TECHNICAL FEATURES

		LD*	TD**
Grade		90	
Roll length (m)	Singlewound	4 600	
	Centerfolded	2 300	
Gloss at 20°		114	
Haze (%)		3	
		LD*	TD**
Elongation at break (%)		95	100
Tensile strength (kg/cm ²)		1 150	1 100
Shrinkage (%)	at 93°C	40	40
	at 120°C	72	68

* LD: Longitudinal Direction - ** TD: Transverse Direction

» Please contact us for any specific request.

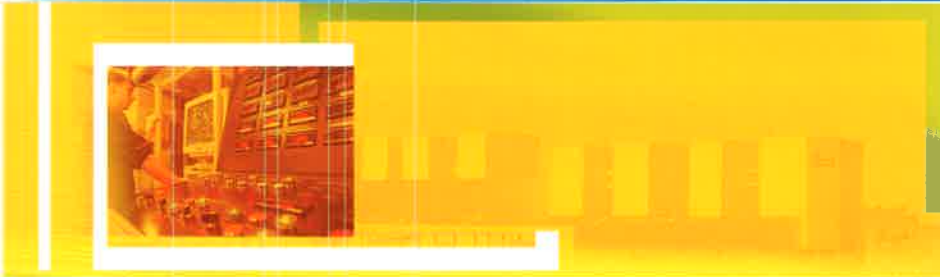

BTT+ 90



Bolphane® Thin Technology



ECO BENEFITS AND COST SAVINGS